



Nice to know

The colour ochre in the BLOQ logo refers to the rushes and the colour palette of the Golden Age in Holland.

Our story

Being part of Betap, BLOQ can build on more than **100 years of experience** in the flooring sector. Betap grew from a local manufacturer of rush mats in 1918 to an internationally renowned carpet manufacturer.

Working with some of the most reputable architects, designers and commercial carpet partners, Betap's high-traffic commercial carpet is used across the world in prestigious office buildings, hotels, universities, museums and various leisure applications. Betap is your partner of choice for commercial carpet.



High-end production line

Group Betap is an **innovative carpet manufacturer** in Genemuiden (The Netherlands) with a vertically integrated production line for tufted and non-woven floor coverings, as well as an own yarn production line.

With BLOQ, we are developing and producing **creative carpet tiles** that comply with the stringent regulations for the commercial market. We offer high-performance tiles focused on office projects, that are sound absorbing and have the best results in fire safety. Our products are also produced following the strictest standards in sustainability.



The Workplace


CONNEXION is part of The Workplace collection. With this mainstream collection group you mark your own, personal workspace. Feel free to play and combine with three collections: TRADITION, CONNEXION and RHYTHM.

The Workplace collections also match perfectly with our The Binary collection, which uses the same colours.



THE WORKPLACE

CONNEXION

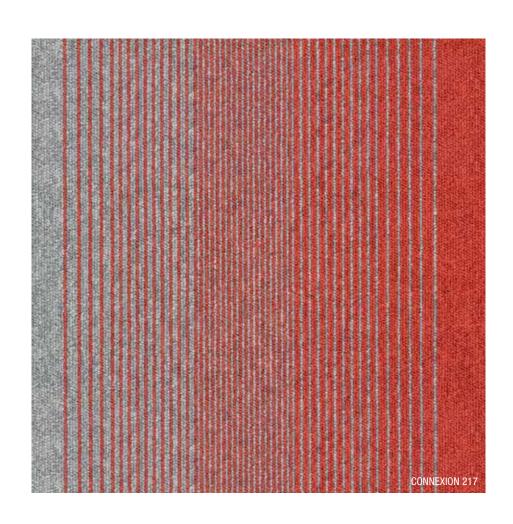




Inspiration is everywhere




Connecting zones

CONNEXION is a tile of 50 x 50 cm. It has a **mixed striped pattern** designed to connect. The pattern makes a connection in your room between a grey zone and a more pronounced coloured zone, made with TRADITION tiles.

Time to play!

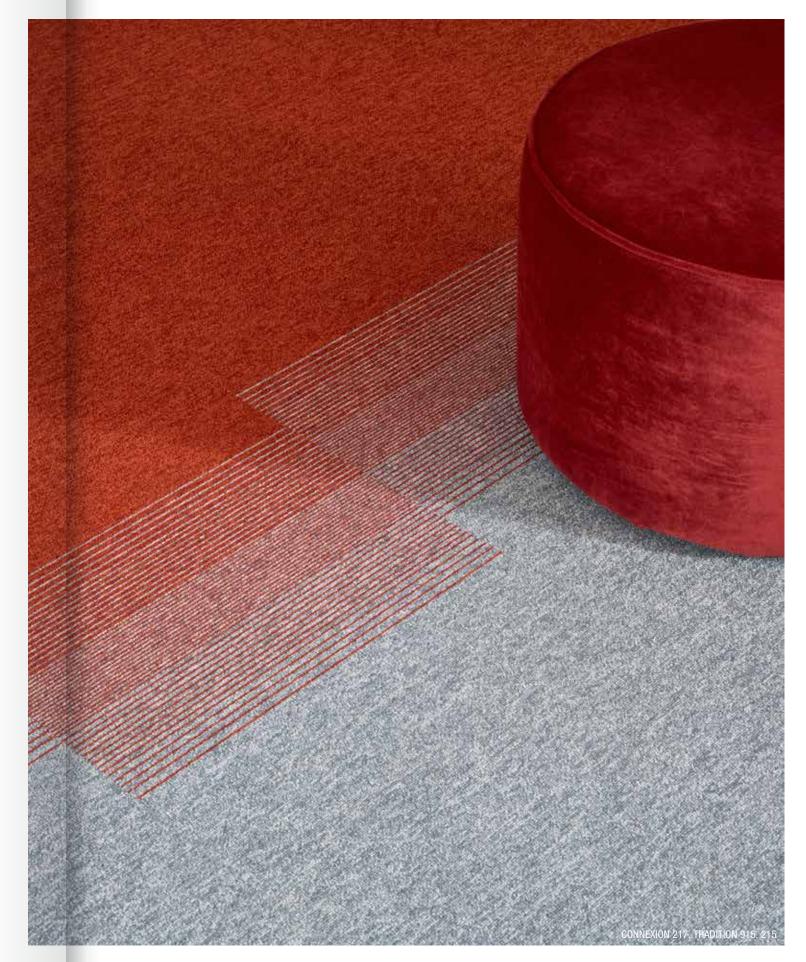

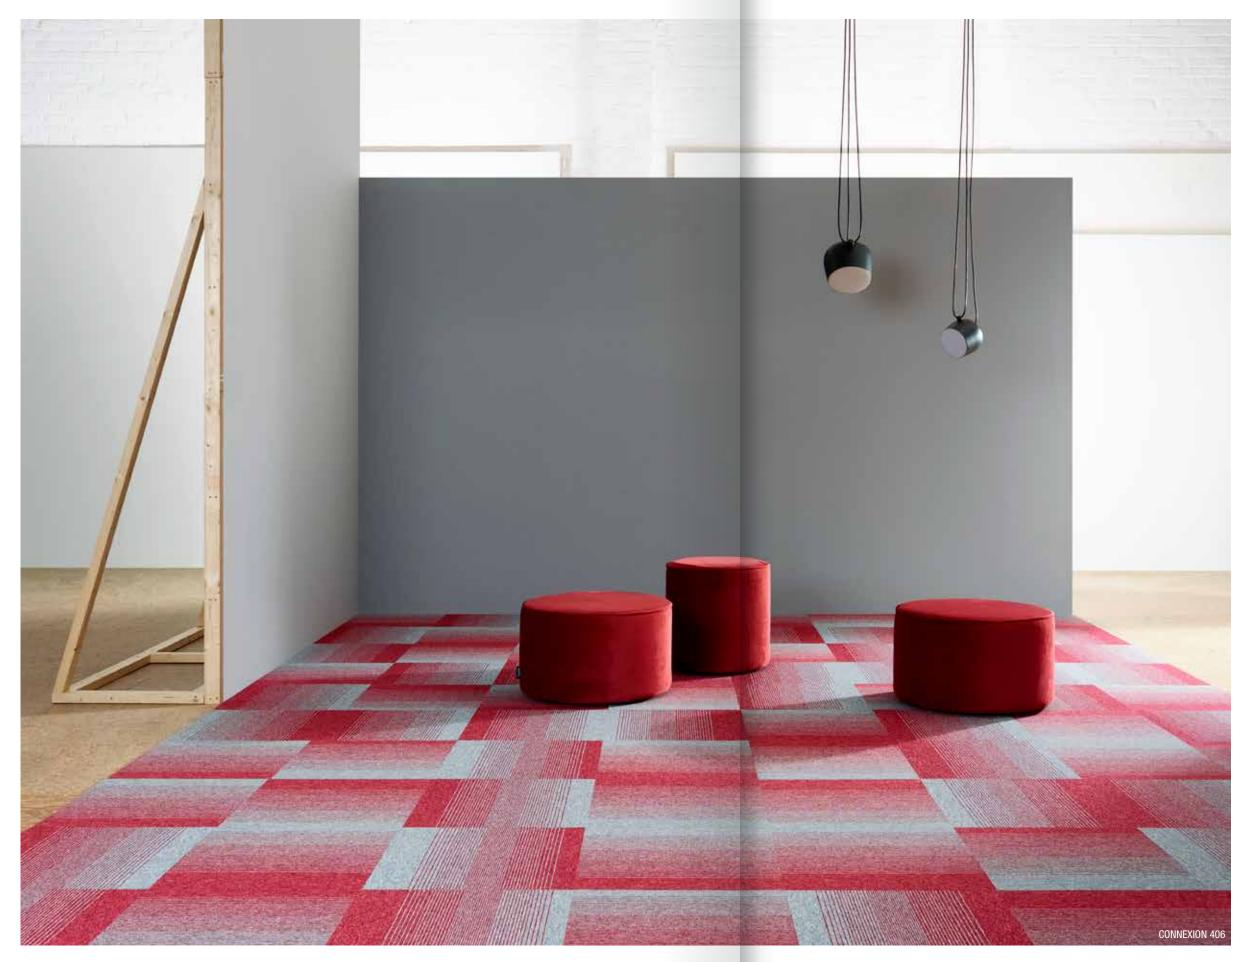

Colour range

CONNEXION comes in **eight connecting colours**: two tone-on-tone colours and six bright colours.

You can use the colours pure as they are, or combined. Discover the fun to play with the matching TRADITION tones and 'connect' with the CONNEXION tiles.



TRADITION 120 PEAT

CONNEXION 122 DUSTY TRAIL






14 BLOQ CONNEXION 15


TRADITION 915 CLOUD





Use the colours pure in **one colour tone or dare to mix** with other tones. Soft hues stimulate a homely feeling at work, current colours meet today's trends.

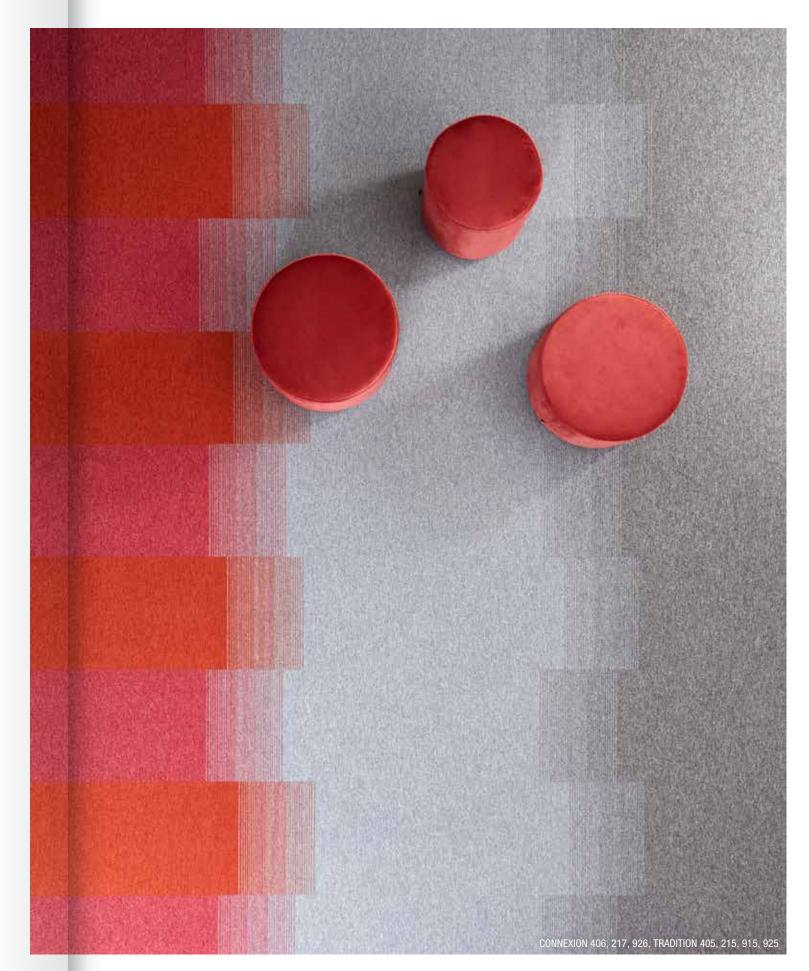

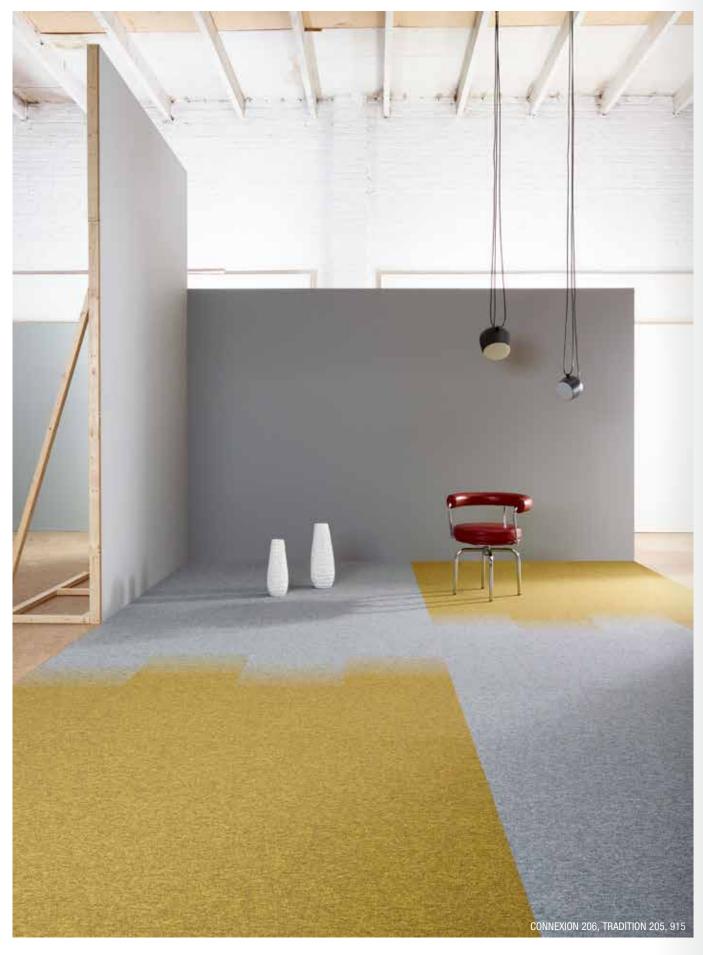



Highlights

BITBACK

BLOQ uses Bitback, Modified Bitumen, which consists of 70% recycled content.

Tiles made with Bitback deliver great acoustic results such as **high sound absorption** and insulation, as well as noise reduction. Therefore carpets made with this sustainable backing contribute substantially to personal health and comfort.





SOLUTION DYED YARNS

BLOQ uses 100% Polyamide 6 Solution Dyed Nylon from **Aquafil**, the best and leading supplier for carpet manufacturers. Solution dyed means better colour fastness and the best results to light and water.

LIGHT REFLECTANCE VALUES

Light Reflectance Value (LRV) is a scale that measures visible and usable light reflected from an illuminated surface. The percentage identifies how much light a colour reflects or absorbs. 0% reflects no visible light, 100% reflects all light.

COLOUR	LRV av	L
122	15.91	46.85
206	17.70	49.13
217	13.05	42.84
406	13.66	43.73
506	12.61	42.18
526	14.32	44.68
611	14.16	44.47
926	15.35	46.11





THE WORKPLACE **CONNEXION**

SPECIFICATIONS

TYPE OF MANUFACTURE Tufted Loop Pile 1/10"

ISO 2424

PILE FIBER COMPOSITION 100% Polyamide 6

ISO 2424 Solution Dyed Nylon made by Aquafil

SECONDARY BACKING Bitback, Modified Bitumen

ISO 2424 70% Recycled Content **DIMENSION** 50 x 50 cm

EN ISO 24342

PILE WEIGHT 540 g/m²

ISO 8543

SURFACE PILE WEIGHT 330 g/m²

ISO 8543

TOTAL WEIGHT 4 250 g/m²

ISO 8543

TOTAL THICKNESS 6.0 mm

ISO 1765

PILE HEIGHT 2.7 mm

ISO 1766

PILE DENSITY 0.123 g/m³ ISO 8543

NUMBER OF TUFTS 156 000 /m² ISO 1763

DIMENSIONAL STABILITY $\leq 0.2\%$

ISO 2551

NUMBER **OF COLOURS**

PACKAGING Box: 20 tiles / 5 m²

Pallet: 200 m²

PERFORMANCE

CLASSIFICATION 33 EN 1307

LUXURY RATING LC1

EN 1307

CASTOR CHAIR RATING A: Intensive use

EN 985

FIRE CLASSIFICATION B.-s1 EN 13501-1

IMPACT SOUND INSULATION △L.: 25 dB

EN ISO 10140-3

 SOUND ABSORBTION
 Frequency Hz
 125
 250
 500
 1000
 2000
 4000

 FN ISO 354
 Q_c
 0.00
 0.03
 0.06
 0.16
 0.30
 0.35
EN ISO 354 as

NOISE REDUCTION α_w : 0.15

EN ISO 354

PERMANENT ANTISTATIC $\leq 2 \text{ kV}$

ISO 6356

TRANSVERSAL RESISTANCE ≤ 1 X 10⁹ Ohm

ISO 10965

THERMAL RESISTANCE 0.064 m² K/W

ISO 8302

COLOUR FASTNESS TO LIGHT ≥ 7 EN ISO 105-B02

COLOUR FASTNESS TO WATER ≥ 4

EN ISO 105-E01

RUBBING FASTNESS ≥ 4


EN ISO 105-X12

GUT N° PRODIS 0D32FA3E









1

All rights reserved to alter technical specifications.

www.blog.nl